

## **ATTACHMENT B**

### **PLM BULK ASBESTOS LABORATORY REPORT**



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

**Attention:** ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016  
**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-01A 031633323-0001	2ND FLOOR ROOM 7 - WALL PLASTER	Gray Non-Fibrous Homogeneous	1% Hair	55% Quartz 30% Gypsum 1% Mica 13% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-01B 031633323-0002	2ND FLOOR ROOM 9A - WALL PLASTER	Gray Non-Fibrous Homogeneous		65% Quartz 20% Gypsum 3% Mica 12% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-01C 031633323-0003	REAR STAIR ROOM 1 - WALL PLASTER	Gray Non-Fibrous Homogeneous	4% Hair	55% Quartz 25% Gypsum 2% Mica 14% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-01D 031633323-0004	2ND FLOOR RM 11 - WALL PLASTER	Gray Non-Fibrous Homogeneous	2% Hair	60% Quartz 1% Mica 37% Non-fibrous (Other)	None Detected
141D-01E 031633323-0005	2ND FLOOR HALL - WALL PLASTER	Gray Non-Fibrous Homogeneous	3% Hair	70% Quartz 27% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-01F 031633323-0006	FRONT STAIR ROOM 2 - WALL PLASTER	Gray Non-Fibrous Homogeneous	1% Hair	65% Quartz 20% Gypsum 2% Mica 12% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-01G 031633323-0007	1ST FLOOR ROOM 3 - WALL PLASTER	Gray Non-Fibrous Homogeneous		60% Quartz 15% Gypsum 25% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-01H 031633323-0008	1ST FLOOR ROOM 2A - WALL PLASTER	Gray Non-Fibrous Homogeneous	1% Hair	60% Quartz 20% Gypsum 2% Mica 17% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%  
Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11505, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

**Attention:** ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016  
**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-01I 031633323-0009	1ST FLOOR HALL - WALL PLASTER	Gray/White Non-Fibrous Homogeneous	5% Hair	38% Quartz 15% Ca Carbonate 2% Mica 40% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-02A 031633323-0010	2ND FLOOR RM 9 - CEILING PLASTER	Gray Non-Fibrous Homogeneous		65% Quartz 20% Gypsum 1% Mica 14% Non-fibrous (Other)	None Detected
141D-02B 031633323-0011	2ND FLOOR HALL - CEILING PLASTER	Gray Non-Fibrous Homogeneous		55% Quartz 15% Gypsum 30% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-02C 031633323-0012	FRONT STAIRWELL - CEILING PLASTER	Brown/Gray Non-Fibrous Homogeneous	1% Hair	50% Quartz 30% Gypsum 19% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-02D 031633323-0013	FRONT STAIR ROOM 1 - CEILING PLASTER	Brown/Gray Non-Fibrous Homogeneous		55% Quartz 25% Gypsum 20% Non-fibrous (Other)	None Detected
141D-02E 031633323-0014	FRONT STAIR CLOSET - CEILING PLASTER	Gray Non-Fibrous Homogeneous	1% Hair	60% Quartz 3% Mica 36% Non-fibrous (Other)	None Detected
141D-02F 031633323-0015	2ND FLOOR ROOM 8 - CEILING PLASTER	Gray Non-Fibrous Homogeneous		70% Quartz 2% Mica 28% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-02G 031633323-0016	2ND FLOOR ROOM 11 - CEILING PLASTER	Gray Non-Fibrous Homogeneous		65% Quartz 2% Mica 33% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%  
Samples analyzed by EMSL Analytical, Inc New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

**Attention:** ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016  
**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-02H 031633323-0017	1ST FLOOR ROOM 4 CLOSET - CEILING PLASTER	Gray Non-Fibrous Homogeneous		75% Quartz 3% Mica 22% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-02I 031633323-0018	BATH BETWEEN 4 AND 5 - CEILING PLASTER	Brown/Gray Non-Fibrous Homogeneous	2% Hair	40% Quartz 4% Mica 54% Non-fibrous (Other)	None Detected
141D-03A 031633323-0019	1ST FLOOR RM 6A - SHEETROCK	Gray Non-Fibrous Homogeneous	5% Cellulose	65% Gypsum 30% Non-fibrous (Other)	None Detected
141D-03B 031633323-0020	2ND FLOOR RM 10 - SHEETROCK	Gray Non-Fibrous Homogeneous	2% Cellulose	60% Gypsum 38% Non-fibrous (Other)	None Detected
141D-03C 031633323-0021	2ND FLOOR RM 9A - SHEETROCK	Gray Non-Fibrous Homogeneous	3% Cellulose	60% Gypsum 37% Non-fibrous (Other)	None Detected
141D-03D 031633323-0022	FRONT STAIR BATH - SHEETROCK	Gray Non-Fibrous Homogeneous	2% Cellulose	60% Gypsum 38% Non-fibrous (Other)	None Detected
Associated joint compound was omitted					
141D-03E 031633323-0023	2ND FLOOR OSE - SHEETROCK	Gray Non-Fibrous Homogeneous		70% Gypsum 30% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-03F 031633323-0024	1ST FLOOR ROOM 6 - SHEETROCK	Gray Non-Fibrous Homogeneous		60% Gypsum 40% Non-fibrous (Other)	None Detected
141D-03G 031633323-0025	1ST FLOOR ROOM 4 - SHEETROCK	Brown/Gray Fibrous Homogeneous	14% Cellulose 2% Glass	52% Gypsum 32% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

**Attention:** ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016  
**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-04A 031633323-0026	1ST FLOOR ROOM 6 - JOINT COMPOUND	White Non-Fibrous Homogeneous		65% Ca Carbonate 2% Mica 33% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-04B 031633323-0027	2ND FLOOR ROOM 8 - JOINT COMPOUND	White Non-Fibrous Homogeneous		60% Ca Carbonate 1% Mica 39% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-04C 031633323-0028	2ND FLOOR ROOM 9 - JOINT COMPOUND	White Non-Fibrous Homogeneous		60% Ca Carbonate 40% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-04D 031633323-0029	2ND FLOOR HALL - JOINT COMPOUND	White Non-Fibrous Homogeneous		65% Ca Carbonate 35% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-04E 031633323-0030	FRONT STAIR BATH - JOINT COMPOUND	White Non-Fibrous Homogeneous		75% Ca Carbonate 2% Mica 23% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-04F 031633323-0031	1ST FLOOR ROOM 3 - JOINT COMPOUND	White Non-Fibrous Homogeneous		70% Ca Carbonate 4% Mica 26% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-04G 031633323-0032	1ST FLOOR ROOM 4 CLOSET - JOINT COMPOUND	White Non-Fibrous Homogeneous		58% Ca Carbonate 6% Mica 36% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-05A 031633323-0033	2ND FLOOR ROOM 11 - 2X4 FISSERED CEILING TILE	Brown Fibrous Homogeneous	30% Cellulose 45% MinWool	15% Perlite 10% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC-IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

Attention: ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
Phone: (413) 781-0070  
Fax: (413) 781-3734  
Received Date: 11/05/2016 6:29 PM  
Analysis Date: 11/09/2016 - 11/10/2016  
Collected Date: 11/04/2016  
Project: 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-05B 031633323-0034	2ND FLOOR ROOM 11 - 2X4 FISSERED CEILING TILE	Gray/White Fibrous Homogeneous	32% Cellulose 30% MinWool	23% Perlite 15% Non-fibrous (Other)	None Detected
141D-07A 031633323-0035	2ND FLOOR ROOM 11 - 2X3 DOOR WINDOW	White Fibrous Homogeneous	<1% Fibrous_Other	40% Ca Carbonate 60% Non-fibrous (Other)	None Detected
141D-07B 031633323-0036	OSE OFFICE - 2X3 DOOR WINDOW	White/Clear Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
glass					
141D-08A 031633323-0037	ATTIC - BLOWN IN INSULATION	Brown Fibrous Homogeneous	90% Cellulose <1% Synthetic	10% Non-fibrous (Other)	None Detected
141D-08B 031633323-0038	ATTIC - BLOWN IN INSULATION	Gray/Tan Fibrous Homogeneous	92% Cellulose	8% Non-fibrous (Other)	None Detected
141D-09A 031633323-0039	1ST FLOOR ROOM 4 - FIBERBOARD ON WALL	Brown Fibrous Homogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
141D-09B 031633323-0040	2ND FLOOR ROOM 7 - FIBERBOARD ON WALL	Brown/White Fibrous Homogeneous	94% Cellulose	6% Non-fibrous (Other)	None Detected
Inseparable paint / coating layer included in analysis					
141D-10A 031633323-0041	2ND FLOOR ROOM 7 - DB GLUE DAUB	Brown Non-Fibrous Homogeneous		20% Non-fibrous (Other)	None Detected
141D-10B 031633323-0042	1ST FLOOR ROOM 4 - DB GLUE DAUB	Brown Non-Fibrous Homogeneous	2% Cellulose	53% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%  
Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

**Attention:** ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089

**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016

**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-11A 031633323-0043	BATH BETWEEN 7 AND 8 - WHITE SQUARE LENOLEUM	Gray/Tan Fibrous Homogeneous	30% Cellulose 5% Glass	65% Non-fibrous (Other)	None Detected
141D-11B 031633323-0044	BATH BETWEEN 7 AND 8 - WHITE SQUARE LENOLEUM	Gray/White Non-Fibrous Homogeneous	24% Cellulose 4% Glass	72% Non-fibrous (Other)	None Detected
141D-12A 031633323-0045	BATH BETWEEN 7 AND 8 - WHITE SQUARE LENOLEUM MASTIC	Brown Non-Fibrous Homogeneous		30% Ca Carbonate 20% Non-fibrous (Other)	None Detected
141D-12B 031633323-0046	BATH BETWEEN 7 AND 8 - WHITE SQUARE LENOLEUM MASTIC	Yellow Non-Fibrous Homogeneous		25% Ca Carbonate 25% Non-fibrous (Other)	None Detected
141D-13A 031633323-0047	BATH BETWEEN 7 AND 8 - 4" BLACK COVE BASE	Black Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
141D-13B 031633323-0048	BATH BETWEEN 7 AND 8 - 4" BLACK COVE BASE	Black Non-Fibrous Homogeneous		22% Ca Carbonate 20% Non-fibrous (Other)	None Detected
141D-14A 031633323-0049	BATH BETWEEN 7 AND 8 - 4" BLACK COVE BASE MASTIC	Black Non-Fibrous Homogeneous		40% Non-fibrous (Other)	None Detected
141D-14B 031633323-0050	BATH BETWEEN 7 AND 8 - 4" BLACK COVE BASE MASTIC	Black Non-Fibrous Homogeneous	2% Cellulose	43% Non-fibrous (Other)	None Detected
141D-15A 031633323-0051	BATH BETWEEN 7 AND 8 - BLUE MARBLE BACKING	Brown/Blue Non-Fibrous Homogeneous	10% Cellulose	90% Non-fibrous (Other)	None Detected
141D-15B 031633323-0052	BATH BETWEEN 7 AND 8 - BLUE MARBLE BACKING	Brown/White/Blue Fibrous Homogeneous	54% Cellulose	46% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC-IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11505, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

**Attention:** ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089

**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016

**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-16A 031633323-0053	BATH BETWEEN 7 AND 8 - BLUE MARBLE BACKING MASTIC	Yellow Non-Fibrous Homogeneous		20% Non-fibrous (Other)	None Detected
141D-16B 031633323-0054	BATH BETWEEN 7 AND 8 - BLUE MARBLE BACKING MASTIC	Yellow Non-Fibrous Homogeneous	4% Cellulose	30% Ca Carbonate 18% Non-fibrous (Other)	None Detected
141D-17A 031633323-0055	BATH BETWEEN 7 AND 8 - BLACK SINK UNDERCOAT	Black Non-Fibrous Homogeneous		20% Ca Carbonate 38% Non-fibrous (Other)	2% Chrysotile
141D-17B 031633323-0056	BATH BETWEEN 7 AND 8 - BLACK SINK UNDERCOAT				Positive Stop (Not Analyzed)
141D-18A 031633323-0057	2ND FLOOR ROOM 9 - YELLOW CARPET GLUE	Yellow Non-Fibrous Homogeneous		30% Ca Carbonate 10% Non-fibrous (Other)	None Detected
141D-18B 031633323-0058	1ST FLOOR ROOM 3 - YELLOW CARPET GLUE	Yellow Non-Fibrous Homogeneous		42% Ca Carbonate 18% Non-fibrous (Other)	None Detected
141D-20A 031633323-0059	BY WATER FOUNTAIN - YELLOW ORANGE VFT	Gray Fibrous Homogeneous		70% Non-fibrous (Other)	30% Chrysotile
141D-20B 031633323-0060	BY WATER FOUNTAIN - YELLOW ORANGE VFT				Positive Stop (Not Analyzed)
141D-21A 031633323-0061	BY WATER FOUNTAIN - YELLOW ORANGE VFT MASTIC	Brown Non-Fibrous Homogeneous	4% Cellulose	36% Non-fibrous (Other)	None Detected
141D-21B 031633323-0062	BY WATER FOUNTAIN - YELLOW ORANGE VFT MASTIC	Brown/Tan Non-Fibrous Homogeneous	6% Cellulose	42% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC-IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44





# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

Attention: ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089  
 Phone: (413) 781-0070  
 Fax: (413) 781-3734  
 Received Date: 11/05/2016 6:29 PM  
 Analysis Date: 11/09/2016 - 11/10/2016  
 Collected Date: 11/04/2016  
 Project: 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-22A 031633323-0063	1ST FLOOR HALL - SECURITY WINDOW DOOR GLAZING	Brown/White Non-Fibrous Homogeneous		10% Ca Carbonate 90% Non-fibrous (Other)	None Detected
141D-22B 031633323-0064	1ST FLOOR HALL - SECURITY WINDOW DOOR GLAZING				Insufficient Material
insufficient glazing on window					
141D-25A 031633323-0065	2ND FLOOR HALL - BROWN CARPET MASTIC	Brown Non-Fibrous Homogeneous		35% Non-fibrous (Other)	None Detected
141D-25B 031633323-0066	2ND FLOOR HALL - BROWN CARPET MASTIC	Brown/Tan Non-Fibrous Homogeneous	5% Cellulose 2% Fibrous_Other	33% Non-fibrous (Other)	None Detected
141D-26A 031633323-0067	FRONT STAIRS - STAIR TRED	Black Non-Fibrous Homogeneous	10% Cellulose	10% Ca Carbonate 80% Non-fibrous (Other)	None Detected
141D-26B 031633323-0068	REAR STAIRS - STAIR TRED	Black Non-Fibrous Homogeneous	14% Cellulose	36% Non-fibrous (Other)	None Detected
141D-27A 031633323-0069	FRONT STAIRS - STAIR TRED MASTIC	Black Non-Fibrous Homogeneous	3% Cellulose	10% Ca Carbonate 17% Non-fibrous (Other)	None Detected
141D-27B 031633323-0070	REAR STAIRS - STAIR TRED MASTIC	Brown Non-Fibrous Homogeneous	8% Cellulose	92% Non-fibrous (Other)	None Detected
141D-28A 031633323-0071	FRONT STAIR BATH - BEIGE 4" COVE BASE	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
141D-28B 031633323-0072	FRONT STAIR BATH - BEIGE 4" COVE BASE	Beige Non-Fibrous Homogeneous		24% Ca Carbonate 16% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC-IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

**Attention:** ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089

**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016

**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-29A 031633323-0073	FRONT STAIR BATH - BEIGE 4" COVE BASE MASTIC	Yellow Non-Fibrous Homogeneous	15% Cellulose	30% Non-fibrous (Other)	None Detected
141D-29B 031633323-0074	FRONT STAIR BATH - BEIGE 4" COVE BASE MASTIC	Tan Non-Fibrous Homogeneous		45% Non-fibrous (Other)	None Detected
141D-30A-Linoleum 031633323-0075	FRONT STAIR BATH - BROWN MARBLE PATTERN LENOLEUM	Brown/White Non-Fibrous Homogeneous	35% Cellulose 10% Glass	55% Non-fibrous (Other)	None Detected
141D-30A-Floor Tile 031633323-0075A	FRONT STAIR BATH - BROWN MARBLE PATTERN LENOLEUM	Brown Non-Fibrous Homogeneous		45% Ca Carbonate 25% Non-fibrous (Other)	None Detected
141D-30B-Linoleum 031633323-0076	FRONT STAIR BATH - BROWN MARBLE PATTERN LENOLEUM	Beige Non-Fibrous Homogeneous	20% Cellulose 5% Glass	75% Non-fibrous (Other)	None Detected
141D-30B-Floor Tile 031633323-0076A	FRONT STAIR BATH - BROWN MARBLE PATTERN LENOLEUM	Tan Non-Fibrous Homogeneous		52% Ca Carbonate 48% Non-fibrous (Other)	None Detected
141D-31A 031633323-0077	FRONT STAIR BATH - BROWN MARBLE PATTERN LENOLEUM MASTIC	Brown/Yellow Non-Fibrous Homogeneous	10% Cellulose	30% Non-fibrous (Other)	None Detected
141D-31B 031633323-0078	FRONT STAIR BATH - BROWN MARBLE PATTERN LENOLEUM MASTIC	Tan Non-Fibrous Homogeneous	3% Cellulose	55% Non-fibrous (Other)	None Detected
141D-34A 031633323-0079	1ST FLOOR ROOM 2 - LIGHT BROWN GLUE DAUB	Brown Non-Fibrous Homogeneous		60% Ca Carbonate 30% Non-fibrous (Other)	None Detected
141D-34B 031633323-0080	1ST FLOOR ROOM 2 - LIGHT BROWN GLUE DAUB	Tan Non-Fibrous Homogeneous		35% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC-IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

Attention: ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089

Phone: (413) 781-0070  
 Fax: (413) 781-3734  
 Received Date: 11/05/2016 6:29 PM  
 Analysis Date: 11/09/2016 - 11/10/2016  
 Collected Date: 11/04/2016

Project: 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-35A 031633323-0081	1ST FLOOR ROOM 1 - BROWN FLOOR PAPER	Brown Fibrous Homogeneous	98% Cellulose	4% Non-fibrous (Other)	None Detected
141D-35B 031633323-0082	1ST FLOOR ROOM 6 - BROWN FLOOR PAPER	Gray Fibrous Homogeneous	85% Cellulose 7% Hair	8% Non-fibrous (Other)	None Detected
141D-36A 031633323-0083	1ST FLOOR ROOM 1 - 4" GRAY COVE BASE	Gray Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
141D-36B 031633323-0084	2ND FLOOR ROOM 1 - 4" GRAY COVE BASE	Gray Non-Fibrous Homogeneous		35% Ca Carbonate 20% Non-fibrous (Other)	None Detected
141D-37A 031633323-0085	3RD FLOOR ROOM 1 - 4" GRAY COVE BASE MASTIC	Beige Non-Fibrous Homogeneous		4% Non-fibrous (Other)	None Detected
141D-37B 031633323-0086	4TH FLOOR ROOM 1 - 4" GRAY COVE BASE MASTIC	White Non-Fibrous Homogeneous		30% Ca Carbonate 15% Non-fibrous (Other)	None Detected
141D-38A 031633323-0087	2ND FLOOR ROOM 7 - GRAY FLOOR PAPER	Gray Non-Fibrous Homogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
141D-38B 031633323-0088	2ND FLOOR STAIR STORAGE - GRAY FLOOR PAPER	Gray Fibrous Homogeneous	82% Cellulose 6% Synthetic 4% Hair	8% Non-fibrous (Other)	None Detected
141D-41A 031633323-0089	BASEMENT WORKSHOP - 12X12 BROWN VFT W/ STREAK	Tan Non-Fibrous Homogeneous		60% Ca Carbonate 3% Non-fibrous (Other)	2% Chrysotile
141D-41B 031633323-0090	BASEMENT WORKSHOP - 12X12 BROWN VFT W/ STREAK				Positive Stop (Not Analyzed)

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

**Attention:** ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089

**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016

**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-42A 031633323-0091	BASEMENT WORKSHOP - 12X12 BROWN VFT W/ STREAK	Black Non-Fibrous Homogeneous		5% Quartz 10% Non-fibrous (Other)	None Detected
141D-42B 031633323-0092	BASEMENT WORKSHOP - 12X12 BROWN VFT W/ STREAK	Black Non-Fibrous Homogeneous		8% Quartz 10% Non-fibrous (Other)	None Detected
141D-47A 031633323-0093	BASEMENT BOYS ROOM - 4X4 CWT GROUT	White Non-Fibrous Homogeneous		20% Quartz 50% Ca Carbonate 30% Non-fibrous (Other)	None Detected
141D-47B 031633323-0094	BASEMENT BOYS ROOM - 4X4 CWT GROUT	White Non-Fibrous Homogeneous		15% Quartz 85% Non-fibrous (Other)	None Detected
141D-48A 031633323-0095	BASEMENT BOYS ROOM - 4X4 CWT THINSET	White Non-Fibrous Homogeneous		45% Quartz 30% Gypsum 25% Non-fibrous (Other)	None Detected
141D-48B 031633323-0096	BASEMENT BOYS ROOM - 4X4 CWT THINSET	Gray Non-Fibrous Homogeneous		38% Quartz 20% Ca Carbonate 42% Non-fibrous (Other)	None Detected
141D-49A 031633323-0097	BASEMENT BOYS ROOM - BROWN SQUARE CFT GROUT	Gray Non-Fibrous Homogeneous		40% Quartz 30% Gypsum 30% Non-fibrous (Other)	None Detected
141D-49B 031633323-0098	BASEMENT BOYS ROOM - BROWN SQUARE CFT GROUT	Gray Non-Fibrous Homogeneous		35% Quartz 32% Gypsum 33% Non-fibrous (Other)	None Detected
141D-50A 031633323-0099	BASEMENT BOYS ROOM - BROWN SQUARE CFT THINSET	Gray Non-Fibrous Homogeneous		45% Quartz 30% Gypsum 25% Non-fibrous (Other)	None Detected
141D-50B 031633323-0100	BASEMENT BOYS ROOM - BROWN SQUARE CFT THINSET	Gray Non-Fibrous Homogeneous		56% Quartz 4% Mica 40% Non-fibrous (Other)	None Detected

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

**Attention:** ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016  
**Project:** 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-51A 031633323-0101	ATTIC - FLEX CONNECTOR	Gray Non-Fibrous Homogeneous		20% Non-fibrous (Other)	None Detected
141D-51B 031633323-0102	ATTIC - FLEX CONNECTOR	Gray Non-Fibrous Homogeneous	28% Glass	72% Non-fibrous (Other)	None Detected
141D-52A 031633323-0103	ATTIC - WHITE ELECTRICAL PAPER	Gray Fibrous Homogeneous		40% Non-fibrous (Other)	60% Chrysotile
141D-52B 031633323-0104	ATTIC - WHITE ELECTRICAL PAPER				Positive Stop (Not Analyzed)
141D-54A 031633323-0105	FRONT DOOR - EXTERIOR DOOR CAULK	Brown/Gray Non-Fibrous Homogeneous		20% Ca Carbonate 76% Non-fibrous (Other)	4% Chrysotile
141D-54B 031633323-0106	FRONT DOOR - EXTERIOR DOOR CAULK				Positive Stop (Not Analyzed)
141D-55A 031633323-0107	2ND STORY FRONT WINDOW - EXTERIOR WINDOW CAULK	Gray Non-Fibrous Homogeneous		30% Ca Carbonate 70% Non-fibrous (Other)	None Detected
141D-55B 031633323-0108	1ST FLOOR WINDOW C SIDE - EXTERIOR WINDOW CAULK	Gray Non-Fibrous Homogeneous		45% Ca Carbonate 55% Non-fibrous (Other)	None Detected
141D-56A 031633323-0109	SECOND STORY WINDOW - EXTERIOR WINDOW GLAZING	Gray Non-Fibrous Homogeneous		25% Ca Carbonate 73% Non-fibrous (Other)	2% Chrysotile
141D-56B 031633323-0110	SECOND STORY WINDOW - EXTERIOR WINDOW GLAZING				Positive Stop (Not Analyzed)

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44



# EMSL Analytical, Inc.

307 West 38th Street New York, NY 10018  
Tel/Fax: (212) 290-0051 / (212) 290-0058  
http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
Customer ID: ATC62  
Customer PO: 11-81-0030  
Project ID:

Attention: ATC Group Services LLC  
73 William Franks Drive  
West Springfield, MA 01089  
Phone: (413) 781-0070  
Fax: (413) 781-3734  
Received Date: 11/05/2016 6:29 PM  
Analysis Date: 11/09/2016 - 11/10/2016  
Collected Date: 11/04/2016  
Project: 141 DAVIS ST/ GREENFIELD MA

## Test Report: Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
141D-57A 031633323-0111	A SIDE - CAULK ON LOWER DECORITIVE STONE	Gray Non-Fibrous Homogeneous		97% Non-fibrous (Other)	3% Chrysotile
141D-57B 031633323-0112	B SIDE - CAULK ON LOWER DECORITIVE STONE				Positive Stop (Not Analyzed)

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Reporting limit is 1%.

Samples analyzed by EMSL Analytical, Inc. New York, NY AIHA-LAP, LLC--HLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

initial report from: 11/10/2016 04:26:44



**EMSL Analytical, Inc.**  
 307 West 38th Street New York, NY 10018  
 Tel/Fax: (212) 290-0051 / (212) 290-0058  
 http://www.EMSL.com / manhattanlab@emsl.com

EMSL Order: 031633323  
 Customer ID: ATC62  
 Customer PO: 11-81-0030  
 Project ID:

**Attention:** ATC Group Services LLC  
 73 William Franks Drive  
 West Springfield, MA 01089

**Phone:** (413) 781-0070  
**Fax:** (413) 781-3734  
**Received Date:** 11/05/2016 6:29 PM  
**Analysis Date:** 11/09/2016 - 11/10/2016  
**Collected Date:** 11/04/2016

**Project:** 141 DAVIS ST/ GREENFIELD MA

The samples in this report were submitted to EMSL for analysis by Asbestos Analysis of Bulk materials via EPA/600 (0513) Method using Polarized Light Microscopy. The reference number for these samples is the EMSL Order ID above. Please use this reference number when calling about these samples.

**Report Comments:**

Sample Receipt Date:	11/05/2016	Sample Receipt Time:	6:29 PM
Analysis Completed Date:	11/10/2016	Analysis Completed Time:	4:01 AM

**Analyst(s):**

Emily Myint PLM (16)

Shahrakur Mahmud PLM (36)

Yolanda Chow PLM (54)

**Samples Reviewed and approved by:**

James Hall, Laboratory Manager  
 or other approved signatory

EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Samples received in good condition unless otherwise noted. Estimated accuracy, precision and uncertainty data available upon request. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc) are reported as a single sample. Reporting limit is 1%

Samples analyzed by EMSL Analytical, Inc New York, NY AIHA-LAP, LLC--IHLAP Accredited #102581, NVLAP Lab Code 101048-9, NYS ELAP 11506, NJ NY022, CT PH-0170, MA AA000170

Initial report from: 11/10/2016 04:26:44

EMSL BY 8935 4731 3755

EMSL MAHATTAN LAB  
RECEIVED  
16 NOV -5 PM 12:15

EMSL-NEW YORK: 307 WEST 38<sup>th</sup> STREET  
NEW YORK, NY 10018-2913  
(212) 284-5948

031633323

Relinquished by: \_\_\_\_\_ Date/Time: 11/4/2016  
 Received by: [Signature] Date/Time: 11/5/16 12:15 PM  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number: \_\_\_\_\_ Date: 11/04/2016  
 Sampled by: Craig Connert  
 Analysis Type: PLM Positive Stop: Yes  
 Turnaround Time: 5-Day  
 Fax Copy by: \_\_\_\_\_  
 Return Samples: Yes No

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void 53

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-01A	2nd Floor Room 7	Wall Plaster	1
	141D-01B	2nd Floor Room 9A	Wall Plaster	1
	141D-01C	Rear Stair Room 1	Wall Plaster	1
	141D-01D	2nd Fl Rm 11	Wall Plaster	1
	141D-01E	2nd Floor Hall	Wall Plaster	1
	141D-01F	Front Stair Room 2	Wall Plaster	1
	141D-01G	1st Floor Room 3	Wall Plaster	1
	141D-01H	1st Floor Room 2A	Wall Plaster	1
	141D-01I	1st Floor Hall	Wall Plaster	1
	141D-02A	2nd Fl Rm 9	Ceiling Plaster	2
	141D-02B	2nd Fl Hall	Ceiling Plaster	2
	141D-02C	Front Stairwell	Ceiling Plaster	2
	141D-02D	Front Stair Room 1	Ceiling Plaster	2
	141D-02E	Front Stair Closet	Ceiling Plaster	2
	141D-02F	2nd Floor Room 8	Ceiling Plaster	2

11/9/16  
4:54 PM  
Whole Program



Relinquished by: \_\_\_\_\_ Date/Time: 11/14/2016  
 Received by: Quarles Date/Time: 11/16/2016  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Phone: (413) 781-0070  
 Email: [derrick.wissman@atcassociates.com](mailto:derrick.wissman@atcassociates.com)  
 Results to: Derrick Wissman  
 Verbal Results: Yes No  
 Cell or Pager #: \_\_\_\_\_  
 Site Fax: \_\_\_\_\_

EMSL MANHATTAN LAB  
 RECEIVED  
 16 NOV - 5 PM 12: 15

EMSL-NEW YORK: 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948

Analysis Type: PLM  
 Turnaround Time: 5-Day  
 Fax Copy by:  
 Return Samples: Yes No  
 Positive Stop: Yes

Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number:  
 Sampled by: Craig Connert Date: 11/04/2016  
 Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void 53

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-02G	2nd Floor Room 11	Ceiling Plaster	2
	141D-02H	1st Floor Room 4 Closet	Ceiling Plaster	2
	141D-02I	Bath Between 4 and 5	Ceiling Plaster	2
	141D-03A	1st Floor Rm 6A	Sheetrock	3
	141D-03B	2nd Floor Rm 10	Sheetrock	3
	141D-03C	2nd Floor Rm 9A	Sheetrock	3
	141D-03D	Front Stair Bath	Sheetrock	3
	141D-03E	2nd Floor OSE	Sheetrock	3
	141D-03F	1st Floor Room 6	Sheetrock	3
	141D-03G	1st Floor Room 4	Sheetrock	3
	141D-04A	1st Floor Rm 6	Joint Compound	4
	141D-04B	2nd Floor Room 8	Joint Compound	4
	141D-04C	2nd Floor Rm 9	Joint Compound	4

11/16/16  
 11/19/16  
 11/19/16  
 11/19/16


11/16/16  
 11/19/16  
 11/19/16

Relinquished by: \_\_\_\_\_ Date/Time: 11/4/2016  
 Received by: [Signature] Date/Time: 11/5/16  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Phone: (413) 781-0070  
 derrick.wissman@atcassociates.com  
 Results to: Derrick Wissman  
 Project Manager: Derrick Wissman  
 Project Address: 141 Davis St, Greenfield MA  
 Project Name: 141 Davis St, Greenfield MA  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connett Date: 11/04/2016

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void 53

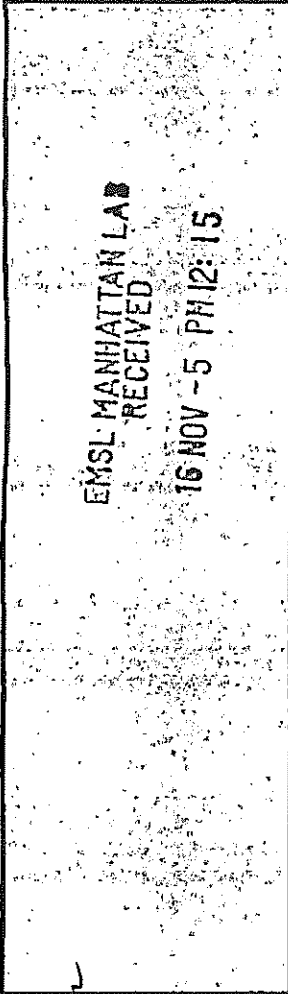

EMSL-NEW YORK: 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948

031633323

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-04D	2nd Floor Hall	Joint Compound	4
	141D-04E	Front Stair Bath	Joint Compound	4
	141D-04F	1st Floor Room 3	Joint Compound	4
	141D-04G	1st Floor Room 4 Closet	Joint Compound	4
	141D-05A	2nd Floor Room 11	2x4 Fissered Ceiling Tile	5
	141D-05B	2nd Floor Room 11	2x4 Fissered Ceiling Tile	5
	141D-07A	2nd Floor Room 11	2x3 Door Window	7
	141D-07B	OSE Office	2x3 Door Window	7
	141D-08A	Attic	Blown in Insulation	8
	141D-08B	Attic	Blown in Insulation	8
	141D-09A	1st Floor Room 4	Fiberboard on Wall	9
	141D-09B	2nd Floor Room 7	Fiberboard on Wall	9
	141D-10A	2nd Floor Room 7	DB Glue Daub	10

11/16/16  
 11/16/16  
 11/16/16  
 11/16/16

11/16/16

Relinquished by: \_\_\_\_\_ Date/Time: 11/4/2016  
 Received by: *[Signature]* Date/Time: 11/5/16 12:15 PM  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

EMSL MANHATTAN LAB  
 RECEIVED  
 16 NOV -5 PM 12:15

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

EMSL-NEW YORK:  
 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948

031633323

Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connett Date: 11/04/2016  
 Analysis Type: PLM Positive Stop: Yes  
 Turnaround Time: 5-Day  
 Fax Copy by: \_\_\_\_\_  
 Return Samples: Yes No

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46. Void 53

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-10B	1st Floor Room 4	DB Gtue Daub	10
	141D-11A	Bath between 7 and 8	White Square Lenolium	11
	141D-11B	Bath between 7 and 8	White Square Lenolium	11
	141D-12A	Bath between 7 and 8	White Square Lenolium Mastic	12
	141D-12B	Bath between 7 and 8	White Square Lenolium Mastic	12
	141D-13A	Bath between 7 and 8	4" Black Cove Base	13
	141D-13B	Bath between 7 and 8	4" Black Cove Base	13
	141D-14A	Bath between 7 and 8	4" Black Cove Base Mastic	14
	141D-14B	Bath between 7 and 8	4" Black Cove Base Mastic	14
	141D-15A	Bath between 7 and 8	Blue Marble Backing	15
	141D-15B	Bath between 7 and 8	Blue Marble Backing	15
	141D-16A	Bath between 7 and 8	Blue Marble Backing Mastic	16
	141D-16B	Bath between 7 and 8	Blue Marble Backing Mastic	16
	141D-17A	Bath between 7 and 8	Black Sink Undercoat	17
	141D-17B	Bath between 7 and 8	Black Sink Undercoat	17
	141D-18A	2nd Floor Room 9	Yellow Carpet Glue	18

YC  
 11/9/16  
 H:54PM

*[Handwritten initials]*

Relinquished by: \_\_\_\_\_ Date/Time: 11/4/2016  
 Received by: Jessie R Date/Time: 11/5/16 12:55pm  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Phone: (413) 781-0070  
 derrick.wissman@atcassociates.com  
 Results to: Derrick Wissman  
 Project Manager: Derrick Wissman  
 Project Address: 141 Davis St, Greenfield MA  
 Project Name: 141 Davis St, Greenfield MA  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connett Date: 11/04/2016

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void 53

EMSL-NEW YORK: 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948  
 EMSL MANHATTAN LAB  
 RECEIVED  
 16 NOV - 5 PH 12:15

Analysis Type: PLM Positive Stop: Yes  
 Turnaround Time: 5-Day  
 Fax Copy by:  
 Return Samples: Yes No

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-18B	1st Floor Room 3	Yellow Carpet Glue	18
	141D-20A	By Water Fountain	Yellow Orange VFT	20
	141D-20B	By Water Fountain	Yellow Orange VFT	20
	141D-21A	By Water Fountain	Yellow Orange VFT Mastic	21
	141D-21B	By Water Fountain	Yellow Orange VFT Mastic	21
	141D-22A	1st Floor Hall	Security Window Door Glazing	22
	141D-22B	1st Floor Hall	Security Window Door Glazing	22
	141D-25A	2nd Floor Hall	Brown Carpet Mastic	25
	141D-25B	2nd Floor Hall	Brown Carpet Mastic	25
	141D-26A	Front Stairs	Stair Tred	26
	141D-26B	Rear Stairs	Stair Tred	26
	141D-27A	Front Stairs	Stair Tred Mastic	27
	141D-27B	Rear Stairs	Stair Tred Mastic	27

YC  
 11/9/16  
 4:54 PM

11/10/16

Relinquished by: \_\_\_\_\_ Date/Time: 11/14/2016  
 Received by: [Signature] Date/Time: 11/16/12:15pm  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connett Date: 11/04/2016

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void 53

EMSL MANHATTAN LAB  
 RECEIVED  
 16 NOV -5 PM 12:15

EMSL-NEW YORK: 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948

Analysis Type: PLM Positive Stop: Yes  
 Turnaround Time: 5-Day  
 Fax Copy by: \_\_\_\_\_  
 Return Samples: Yes No

031633323

YC  
 11/9/16  
 4:54pm

11/16/16

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-28A	Front Stair Bath	Beige 4" Cove Base	28
	141D-28B	Front Stair Bath	Beige 4" Cove Base	28
	141D-29A	Front Stair Bath	Beige 4" Cove Base Mastic	29
	141D-29B	Front Stair Bath	Beige 4" Cove Base Mastic	29
	141D-30A	Front Stair Bath	Brown Marble Pattern Lenolium	30
	141D-30B	Front Stair Bath	Brown Marble Pattern Lenolium	30
	141D-31A	Front Stair Bath	Brown Marble Pattern Lenolium Mastic	31
	141D-31B	Front Stair Bath	Brown Marble Pattern Lenolium Mastic	31
	141D-34A	1st Floor Rm 2	Light Brown Glue Daub	34
	141D-34B	1st Floor Rm 2	Light Brown Glue Daub	34

Relinquished by: \_\_\_\_\_ Date/Time: 11/14/2016  
 Received by: Guarante Date/Time: 11/5/16 12:50pm  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Phone: (413) 781-0070  
 Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connett Date: 11/04/2016

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void 53

EMSL-NEW YORK: 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948  
 EMSL MANHATTAN LAB  
 RECEIVED  
 16 NOV -5 PM 12:15

Analysis Type: PLM Positive Stop: Yes  
 Turnaround Time: 5-Day  
 Fax Copy by: \_\_\_\_\_  
 Return Samples: Yes No

031633323

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-35A	1st Floor Room 1	Brown Floor Paper	35
	141D-35B	1st Floor Room 6	Brown Floor Paper	35
	141D-36A	1st Floor Rm 1	4" Gray Cove Base	36
	141D-36B	2nd Floor Rm 1	4" Gray Cove Base	36
	141D-37A	3rd Floor Rm 1	4" Gray Cove Base Mastic	37
	141D-37B	4th Floor Rm 1	4" Gray Cove Base Mastic	37
	141D-38A	2nd Floor Rm 7	Gray Floor Paper	38
	141D-38B	2nd Floor Stair Storage	Gray Floor Paper	38
	141D-41A	Basement Workshop	12x12 Brown VFT w/ Streak	41
	141D-41B	Basement Workshop	12x12 Brown VFT w/ Streak	41

Emily Mignot 11-9-16 14:30

21546

Relinquished by: Assach Date/Time: 11/4/2016  
 Received by: Assach Date/Time: 11/5/16 12:15pm  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connatt Date: 11/04/2016

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46, Void# 53

EMSL MANHATTAN LAB  
 RECEIVED  
 16 NOV -5 PM 12:16

EMSL-NEW YORK:  
 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948

031633323

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-42A	Basement Workshop	12x12 Brown VFT w/ Streak Mastic	42
	141D-42B	Basement Workshop	12x12 Brown VFT w/ Streak Mastic	42
	141D-47A	Basement Boys Room	4x4 CWT Grout	47
	141D-47B	Basement Boys Room	4x4 CWT Grout	47
	141D-48A	Basement Boys Room	4x4 CWT Thinset	48
	141D-48B	Basement Boys Room	4x4 CWT Thinset	48
	141D-49A	Basement Boys Room	Brown Square CFT Grout	49
	141D-49B	Basement Boys Room	Brown Square CFT Grout	49
	141D-50A	Basement Boys Room	Brown Square CFT Thinset	50
	141D-50B	Basement Boys Room	Brown Square CFT Thinset	50
	141D-51A	Basement Boys Room	Flex Connector	51

Charly Mynatt 11-9-16 14:30

031633323

Relinquished by: \_\_\_\_\_ Date/Time: 11/4/2016  
 Received by: Gregory Date/Time: 11/16/2016  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Relinquished by: \_\_\_\_\_ Date/Time: \_\_\_\_\_  
 Received by: \_\_\_\_\_ Date/Time: \_\_\_\_\_

Company Name: ATC Associates, Inc.  
 Company Address: 73 William Franks Rd  
 City: West Springfield State: MA Zip: 01089

Project Name: 141 Davis St, Greenfield MA  
 Project Address: 141 Davis St, Greenfield MA  
 Project Manager: Derrick Wissman  
 Project Number: \_\_\_\_\_  
 Sampled by: Craig Connert Date: 11/04/2016

Special Instructions or Comments: Please Sample all Plasters, Sheet Rock, and Joint Compound. Assume # 6, 19, 23, 24, 32, 33, 39, 40, 43, 44, 45, 46. Void 53

EMSL-MANHATTAN LAB  
 RECEIVED  
 16 NOV -5 PM 12:16

EMSL-NEW YORK:  
 307 WEST 38<sup>th</sup> STREET  
 NEW YORK, NY 10018-2913  
 (212) 284-5948

03633323

Analysis Type: PLM Positive Stop: Yes  
 Turnaround Time: 5-Day  
 Fax Copy by: \_\_\_\_\_  
 Return Samples: Yes No

Lab ID	Field ID	Location	Sample Description	Homogenous Area #
	141D-51B	Attic	Flex Connector	51
	141D-52A	Attic	White Electrical Paper	52
	141D-52B	Attic	White Electrical Paper	52
	141D-54A	Front Door	Exterior Door Caulk	54
	141D-54B	Front Door	Exterior Door Caulk	54
	141D-55A	2nd Story Front Window	Exterior Window Caulk	55
	141D-55B	1st Floor Window C Side	Exterior Window Caulk	55
	141D-56A	Second Story Window	Exterior Window Glazing	56
	141D-56B	Second Story Window	Exterior Window Glazing	56
	141D-57A	A Side	Caulk on lower Decorative Stone	57
	141D-57B	B Side	Caulk on lower Decorative Stone	57

Bundy Mgmt 11-9-16 7:45:30

*[Signature]*